


Features:

- Two-way active speaker with one 15" woofer and one 1.7" driver.
- Cabinet is made from polypropylene and special high-tech material. It's durable, anti-shock and has good damping characters.
- Voice coil in the 15" woofer is made from \varnothing 75mm copper cladding aluminium ribbon wire.
- Heavy duty protective grille.
- Rotatable 50-100°x55° (HxV) dispersion horn makes it suitable for any performance purposes.
- Molded-in pole mount, easily suspended.
- Vertical or horizontal layout, can be used as a monitor or in any flying systems.
- Arrayable vertically in 4 layers or horizontally in more than 8 columns.



Model:U15A

Technical Parameters


System:	Built-in crossover two way full range active speaker
Driver Quantity:	15"x1(Low) \varnothing 44mmx1 Driver


Frequency Response(-3dB):	40Hz-18kHz
Frequency Response(-10dB):	35Hz-20kHz
Max Sound Level(dB/1M):	127dB
Level Adjust range:	\pm 10dB(100Hz)-Bass \pm 10dB(10kHz)-Treb

Output power:	520W
Distortion:	Line-0.02%, Microphone-0.04%
Rotatable horn(HxV):	50-100°x55°

Load impedance:	Treb - 8Ohm, Bass - 8 Ohm
Input impedance:	Line - 15kOhm, Microphone - 1kOhm
Connectors:	XLR K3P
Power supply:	AC 115V/230V, 50Hz/60Hz

Dimensions(WxDxH mm/pc):	485X460X700mm
Packing Dimensions(WxDxH mm/pc)	545X515X800mm
Net Weight(kg/pc):	30.5kg
Gross Weight(kg/pc):	33.7kg

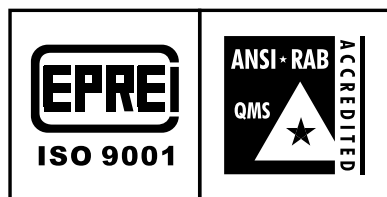

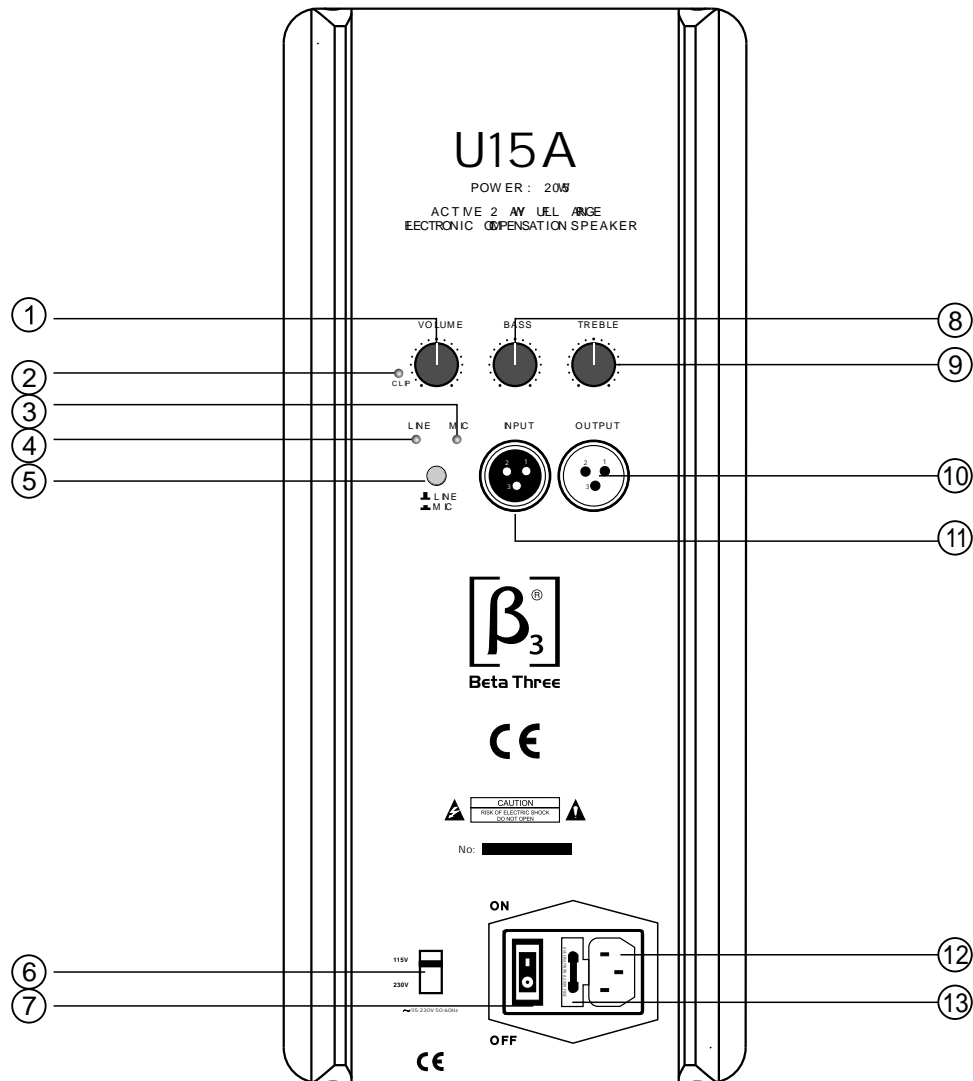

- | | |
|--|---|
| <ul style="list-style-type: none"> 1. Volume control. 2. Clip indicator. 3. Microphone input signal presence indicator. 4. Line input signal presence indicator. 5. Line/microphone selector. 6. 115V/230V voltage input selector. 7. Power ON/OFF switch. 8. Bass control. | <ul style="list-style-type: none"> 9. Treble control. 10. Line/microphone output. 11. Line/microphone input. 12. Power supply input. Make sure that the voltage selector is set for your country's correct voltage. 13. Protection fuse. Use only fuses of the correct amp rating. |
|--|---|

Cosmetic changes may be made