

3G Audio

E-2002-0228-01(1)

3G Audio

PROFESSIONAL KTV SYSTEMS

G SERIES _____ **G-60B/C/D/E**
DK-2000

OWNER'S MANUAL _____ **ENGLISH**

ATTENTION

THANK YOU FOR PURCHASING THIS UNIT!
TO MAKE SURE FULL AND EFFECTIVE USE OF IT, PLEASE READ THIS MANUAL CAREFULLY BEFORE OPERATION. AND PLEASE SAVE THIS MANUAL FOR FUTURE REFERENCE.
IT'S POSSIBLE THAT THE SHAPE OF THE PLUGS AND JACKS ARE DIFFERENT IN DIFFERENT COUNTRIES, BUT THE CONNECTION WAYS AND OPERATION FOR THIS UNIT ARE THE SAME.

SPECIFICATIONS

Cosmetic changes may be made

Power Output(RMS)

G-60B/C/E ----- 125W+125W(8Ohm)
G-60D ----- 180W+180W(8Ohm)
DK-2000----- 125W+125W(8Ohm)

THD 0.3% 20Hz-20KHz

Frequency Response ----- 20Hz-20KHz ± 2dB

Input Sensitivity/Impedance

Microphone ----- 0.5mv-100mv/2KOhm
Line ----- 0.707v/51KOhm
Video ----- 1Vp-p/75Ohm

Pitch Control

Music
Bass(Gain/Attenuation) ----- ± 12dB
Treble(Gain/Attenuation) ----- ± 12dB

Microphone

Bass(Gain/Attenuation) ----- ± 12dB
Treble(Gain/Attenuation) ----- ± 6dB

Output Sensitivity/Impedance

Audio ----- 0.707V/1KOhm
Video ----- 1Vp-p/75Ohm

Microphone Balance Input/output

Microphone Output ----- 0--2Vp-p
Microphone Mixing Input MAX:3.3Vp-p(150W-8Ohm)

Short Circuit Protection

Output Impedance ----- 2-16Ohm
Recommendatory Impedance ----- 8Ohm

Power Supply ----- AC 110V-240V/50Hz

Standard Power Supply ----- AC 220V/50Hz

Power Consumption

G-60B/C/E ----- 380W
G-60D ----- 600W
DK-2000 ----- 380W

AC Power Outlets

Switched ----- 200W
Unswitched ----- 300W

Static Power Consumption

G-60B/C/E ----- 20W
G-60D ----- 30W
DK-2000 ----- 20W

Net Weight

G-60B/E ----- 12 KG
Gross Weight ----- 13.5KG
G-60C ----- 10.5KG
Gross Weight ----- 12 KG
G-60D ----- 14 KG
Gross Weight ----- 15.5KG
DK-2000 ----- 12 KG
Gross Weight ----- 13.5KG



Dimensions ----- 495x426x190(MM)

ADDITIONAL INSTRUCTION

SAFETY REGULATIONS


ABNORMAL PHENOMENA:

Please turn off the power and pull out the plug when you find unusual sound or smell when operation.

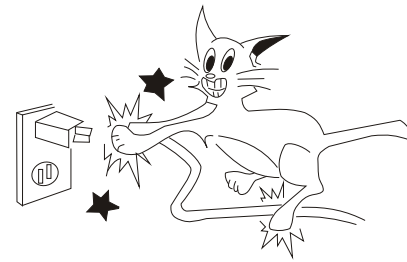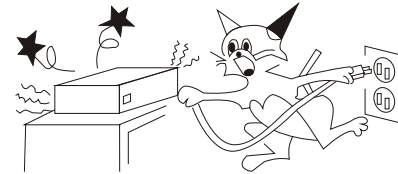


POWER CORDS PROTECTION

Don't touch power cords with wet hands to avoid electric shock.
Don't put the cords in crowded people.


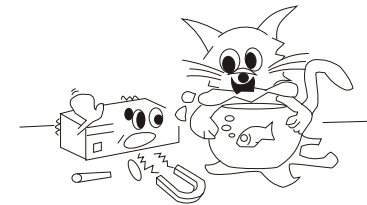


KEEP AWAY FROM WATER AND SUNDRY GOODS

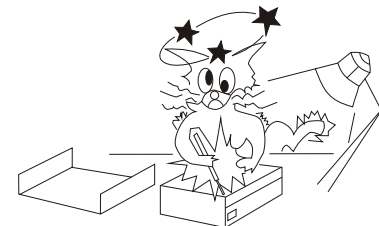

DON'T OPEN THE COVER IF NOT GUIDED BY A QUALIFIED ELECTRICIAN

PULL OUT THE POWER CORDS TO AVOID FIRE WHEN YOU DON'T USE THIS UNIT.

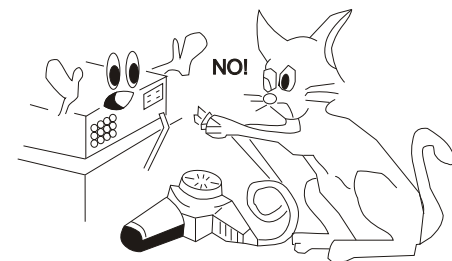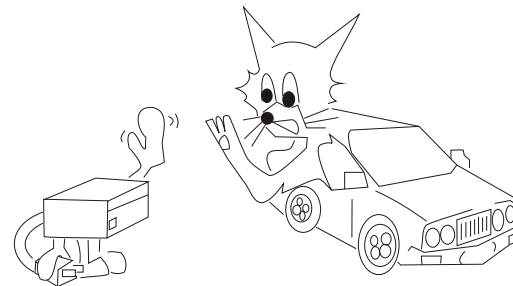

DON'T OVERLOAD IT

CONTENTS

Voltage Input	4
INTRODUCTION	
Features	5
Signal Cords	5
Front Panel(G-60B)	6
Front Panel(G-60C)	7
Front Panel(G-60D)	8
Front Panel(G-60E)	9
Front Panel(DK-2000)	10
Back Panel	11
INSTALLATION	
Before Connection	12
System Connection	12
Remote Control Unit	13
ADDITIONAL INSTRUCTION	
Safety Regulations	14
Specification	15


VOLTAGE INPUT

How to select right voltage input?

There's a voltage selector on the back panel of this unit and voltage intensity of this unit has been set between 220V-240V originally.

Please check your local voltage intensity comply with this or not before operation. if not, you can select it between 110v-120v by the voltage selector.

The power supply cord should be disconnected before adjusting the voltage input.

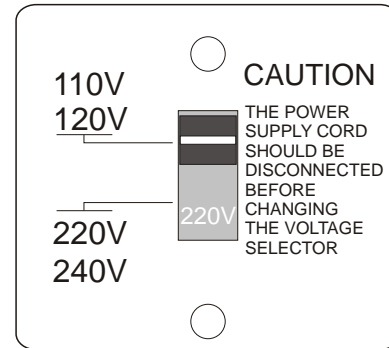


ACCESSORIES

There is a owner's manual in the package accompany with this unit, please check it when open the package.

CONNECTIONS

REMOTE CONTROL UNIT

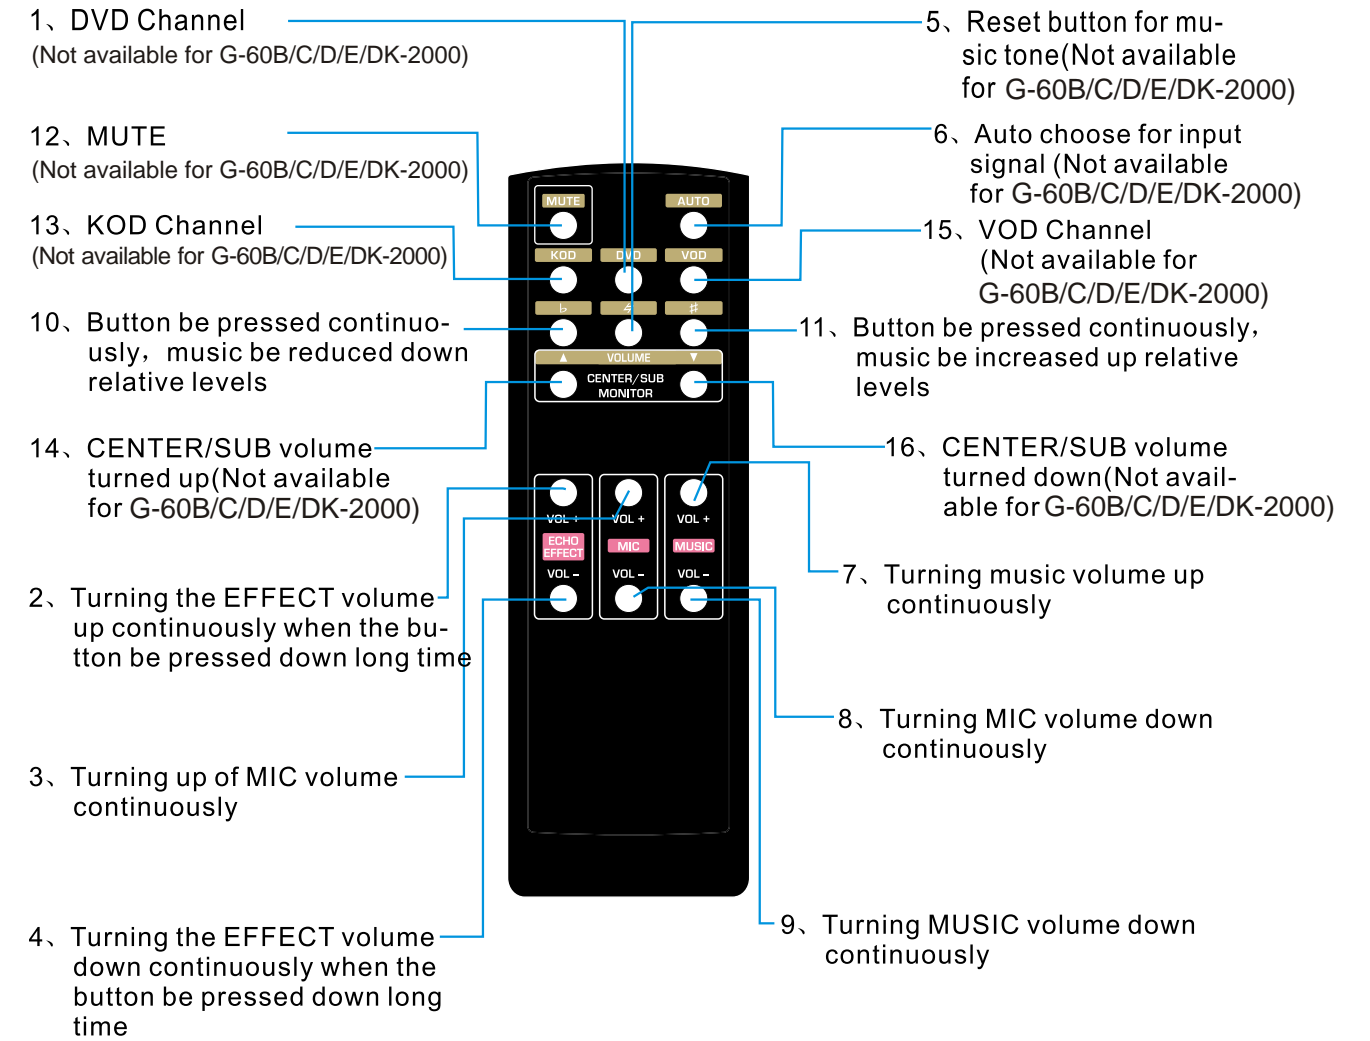


CONNECTIONS


BEFORE CONNECTION

CONNECTION OF SPEAKER CORDS

1. Press down the button as illustration, insert the cords into the hole.
 2. Spring of the button will fix the cords.
- Please select the suitable speaker cords and connect it through the shortest path.

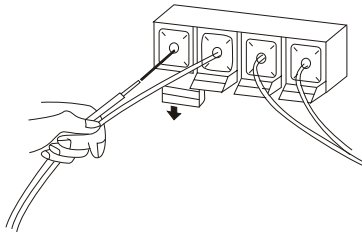


This unit could connect one or two group speakers simultaneously. If only connect one group speakers, you can select connect group A or group B. And please note that phase of the speaker cords are correct or not, if not, the sound will be felt unnatural and absence of low frequency.

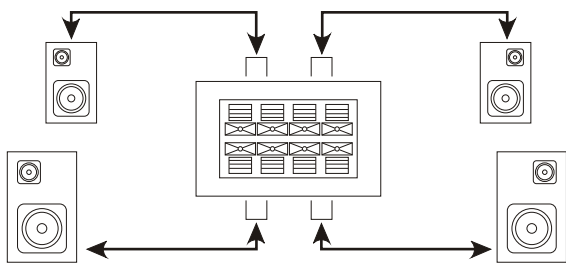

Attention: ends of the cords should not touch each other.

SYSTEM CONNECTION

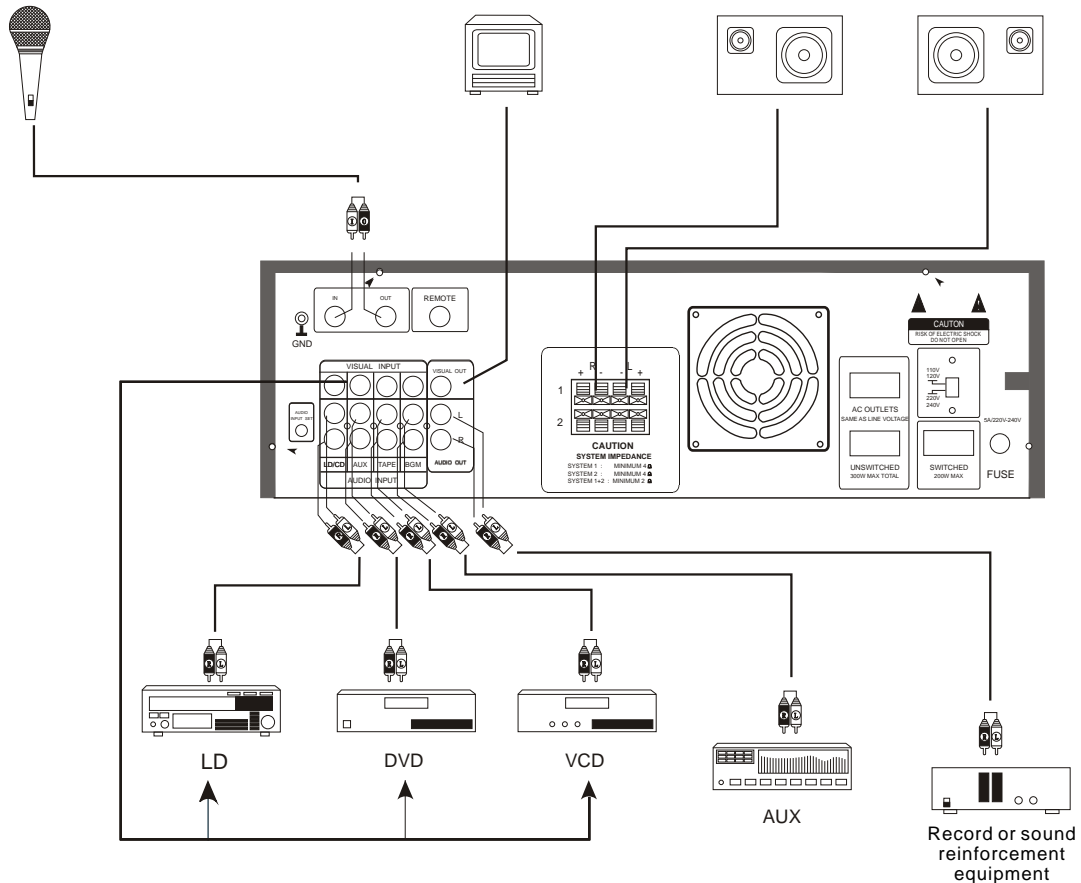


INTRODUCTOIN

Please read this manual carefully before operation. And please save this manual for future reference.

FEATURES

- Inhibiting whistle strongly.
- Multi-mode singing style.
- Special design for KTV room, high reliability.
- Able to connect two group speakers simultaneously.
- Special drive design of human voice to make voice rich and nature
- strong cooling fan makes sure long-term working.


SIGNAL CONNECTION CORDS




RCA plugs available
 Note: RCA plug in red should insert into jack in red.
 RCA plug in white should insert into jack in white.

FUNCTION INSTRUCTIONS (FRONT PANEL)

G-60B

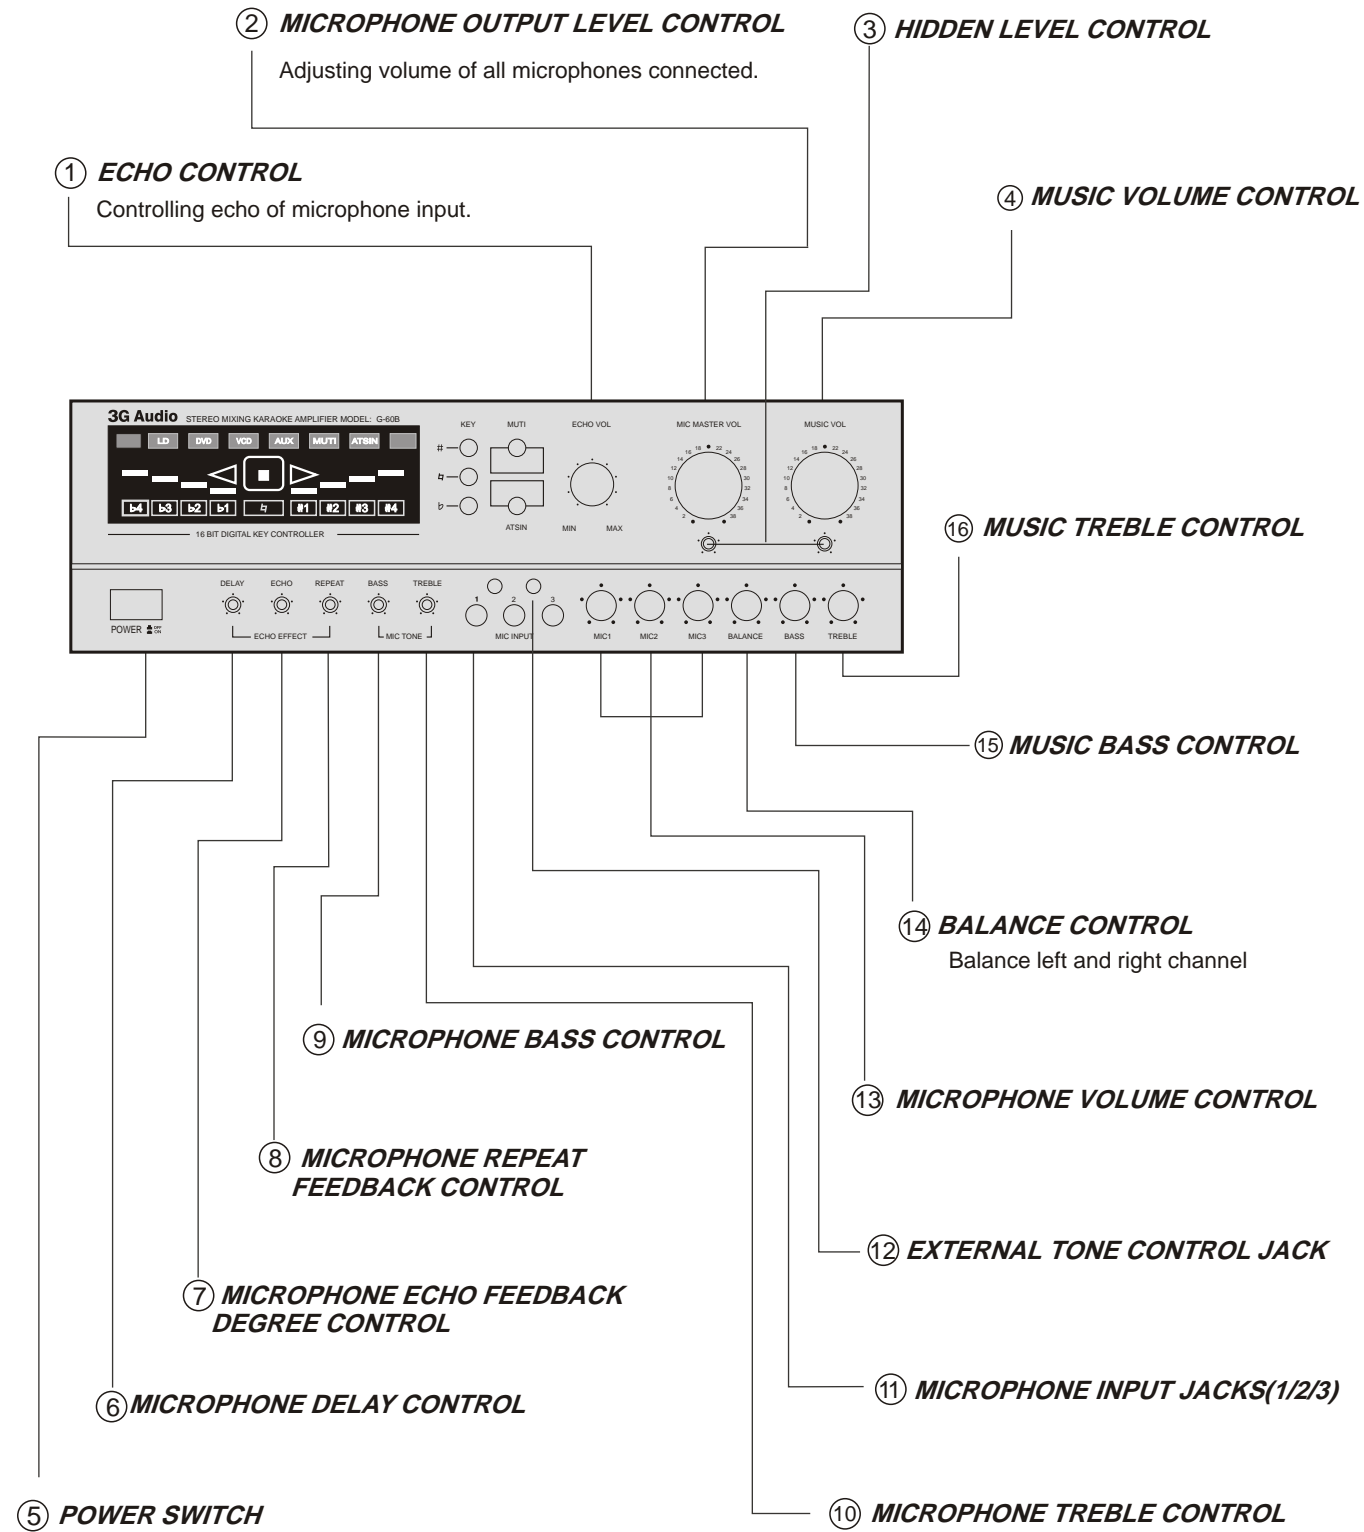


BACK PANEL

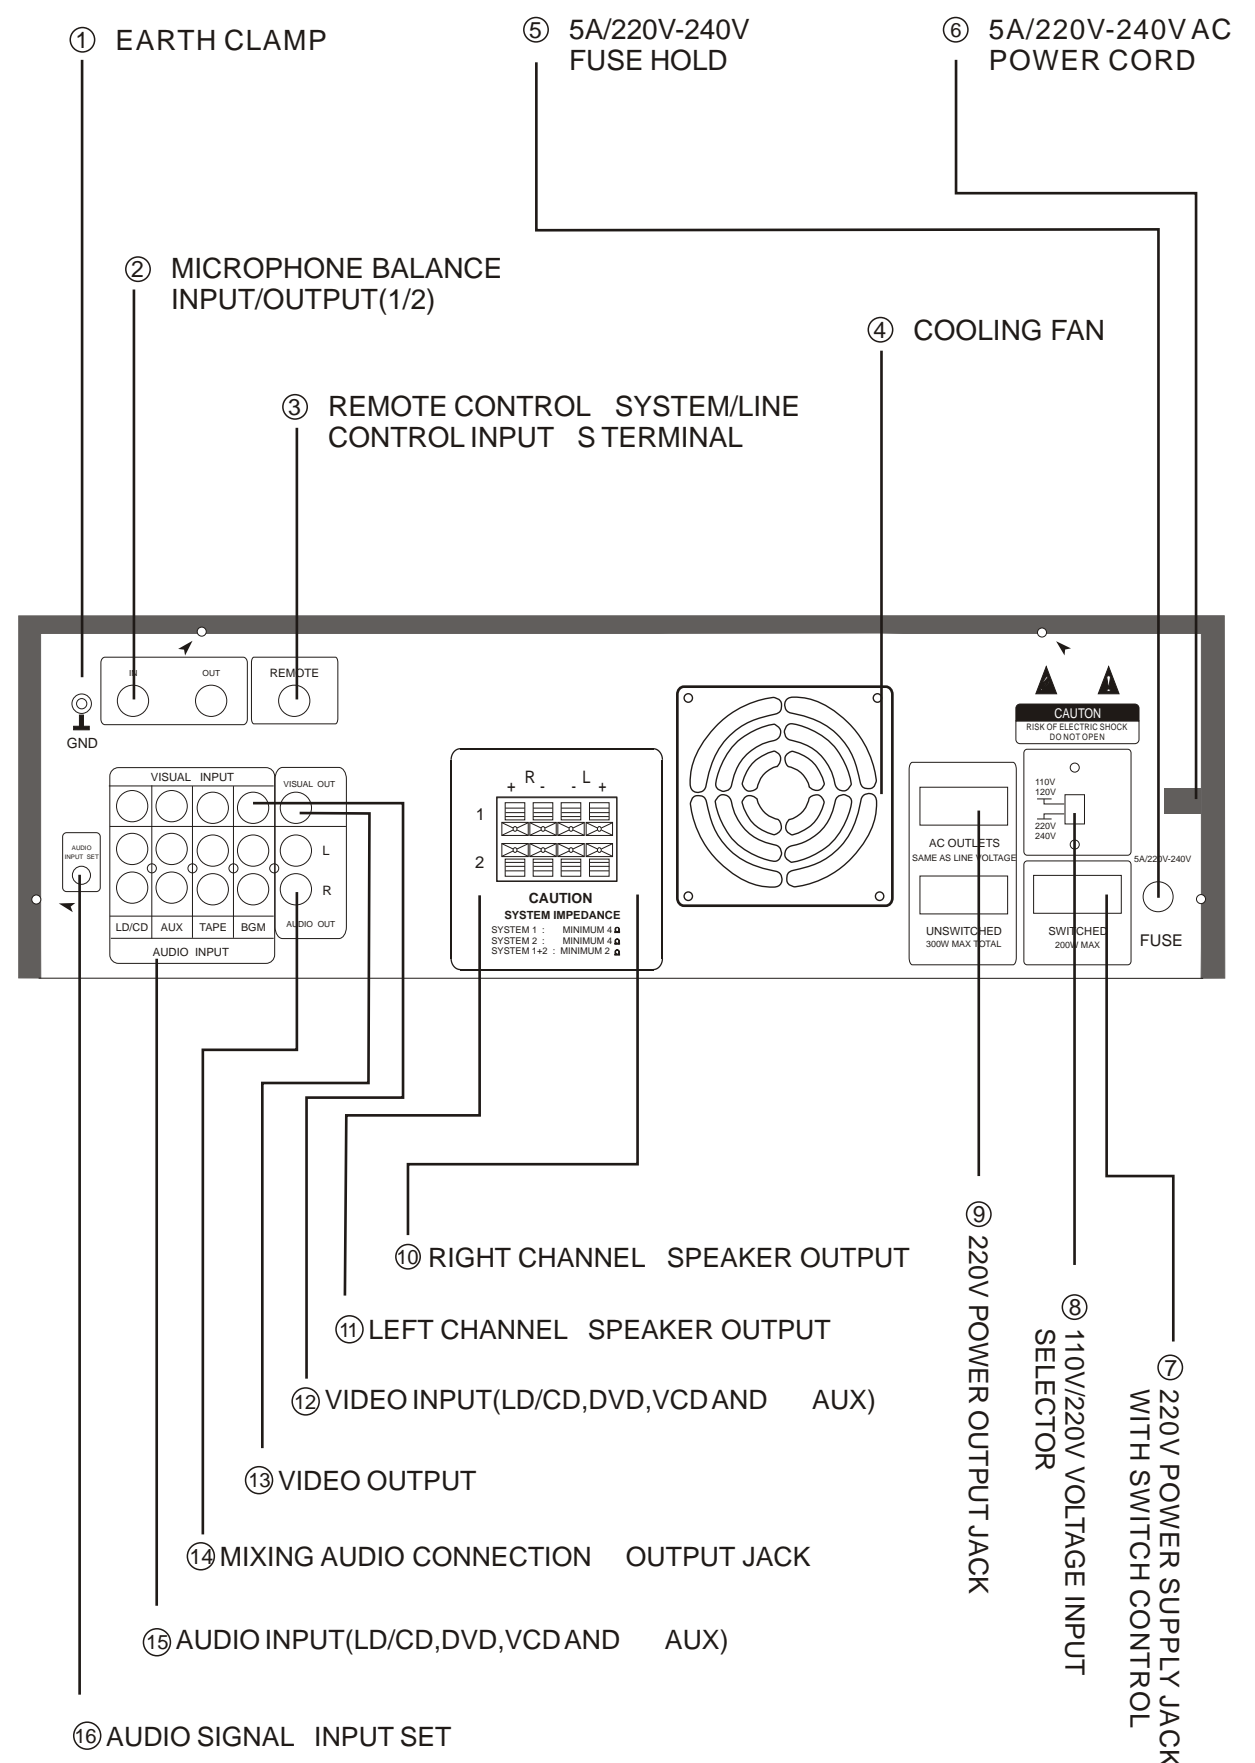


FUNCTION INSTRUCTIONS (FRONT PANEL)

DK-2000

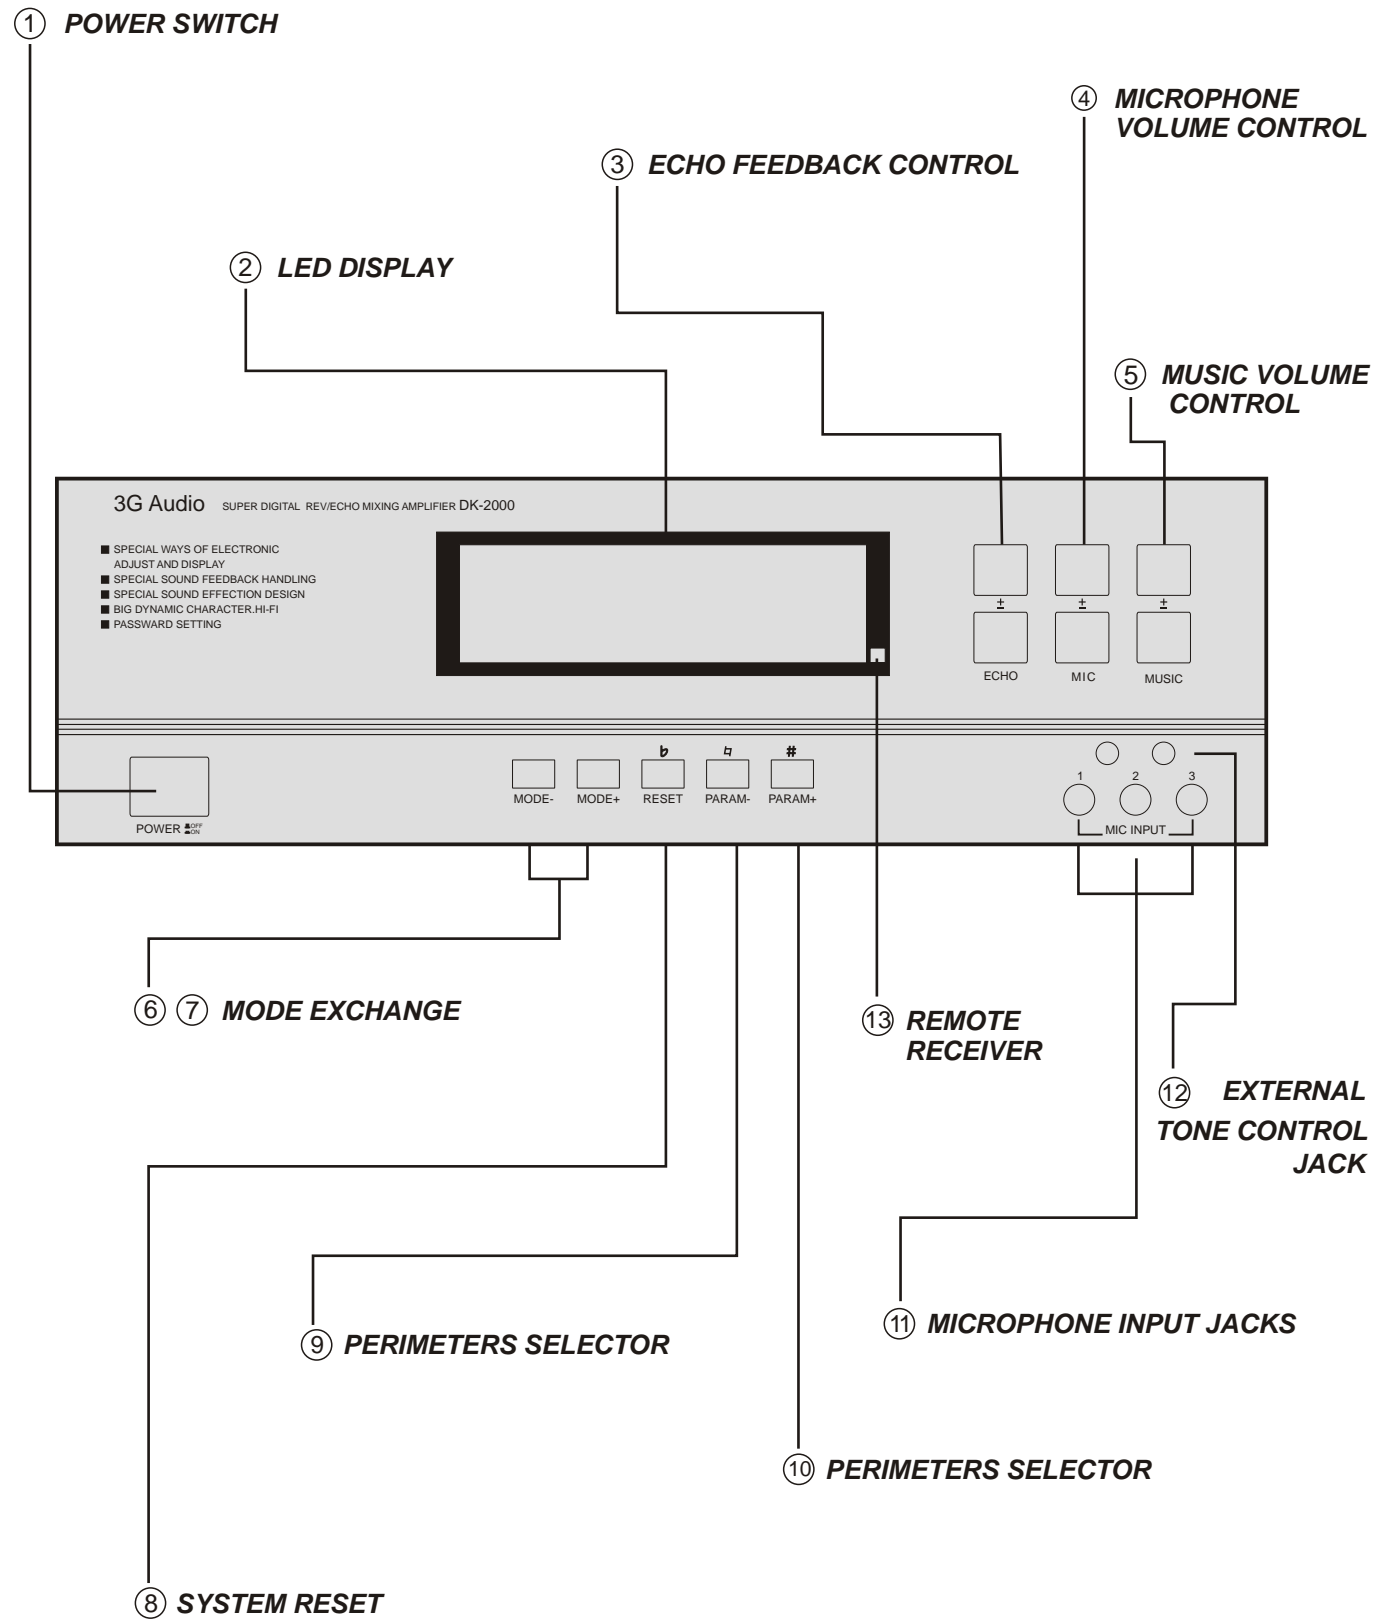


FUNCTION INSTRUCTIONS (FRONT PANEL)

G-60C

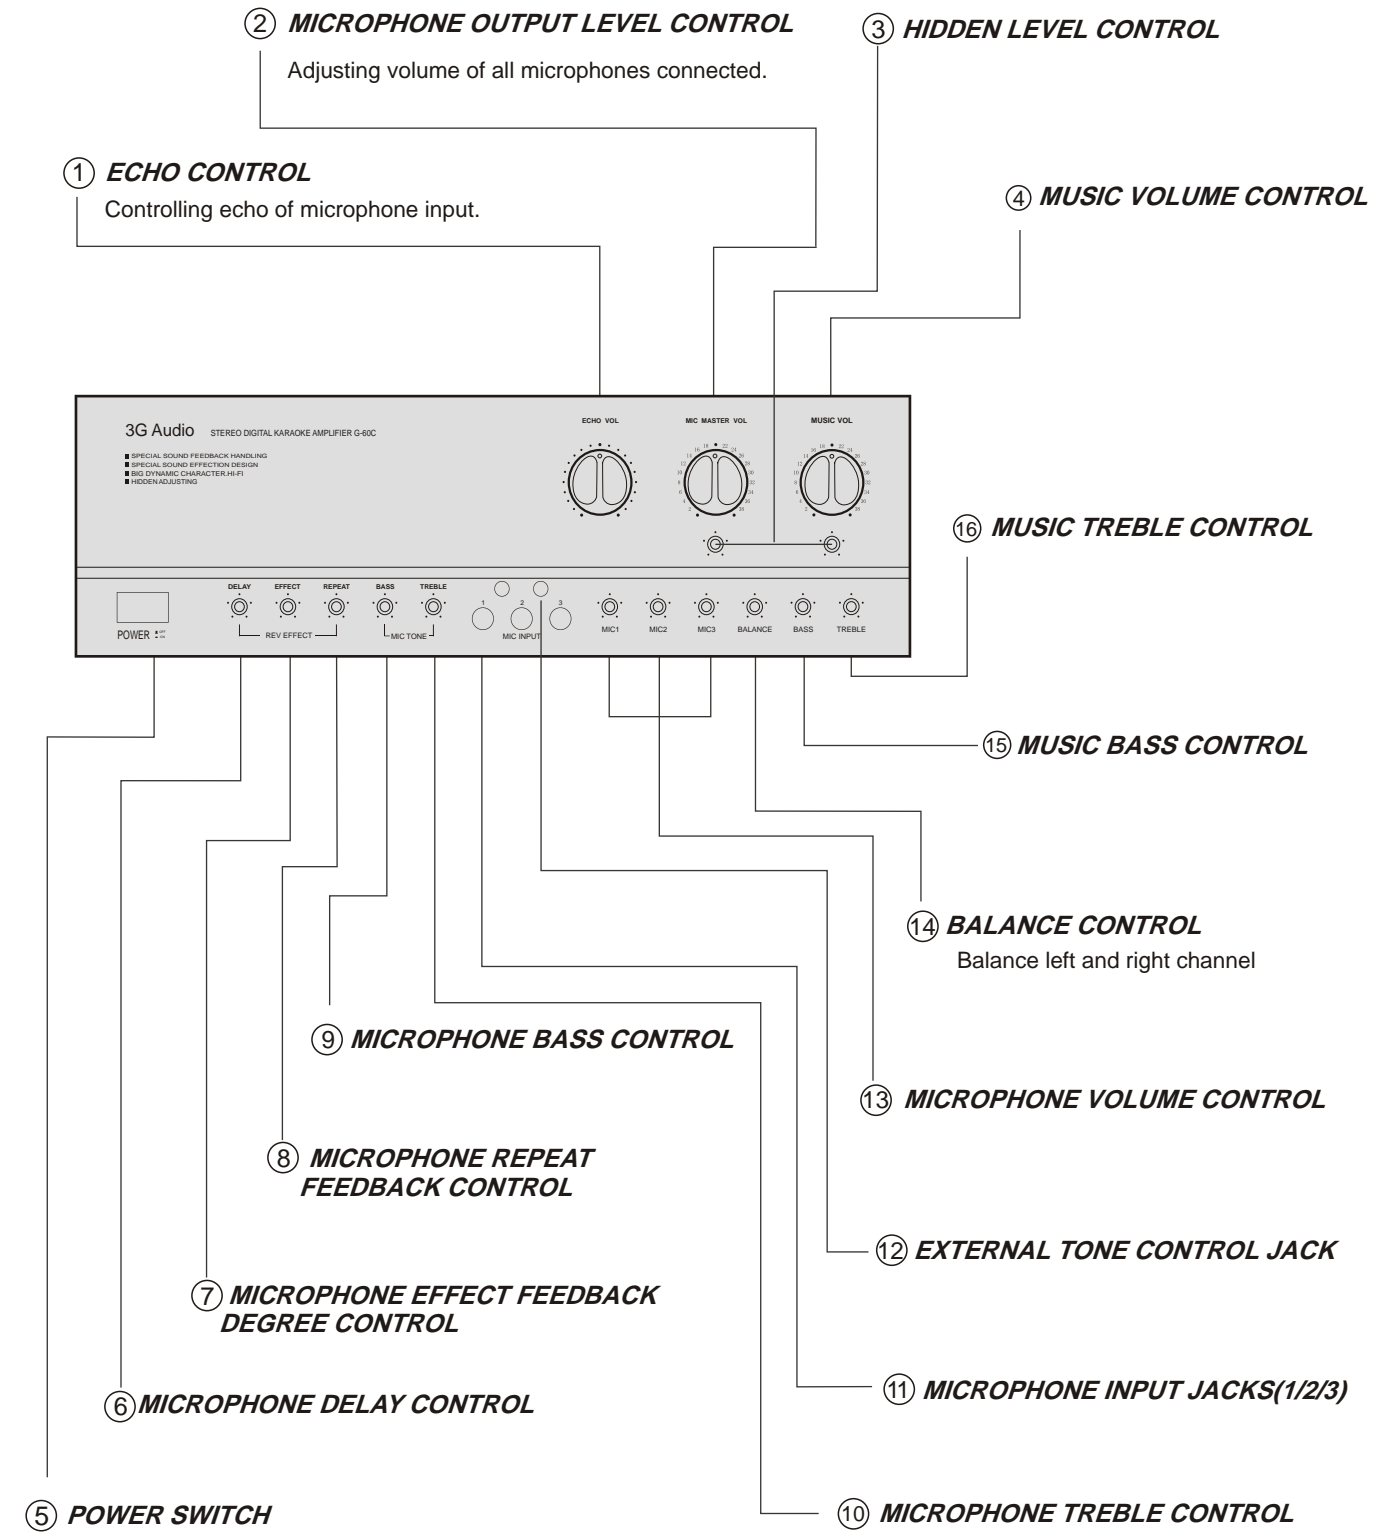

FUNCTION INSTRUCTIONS (FRONT PANEL)

G-60D

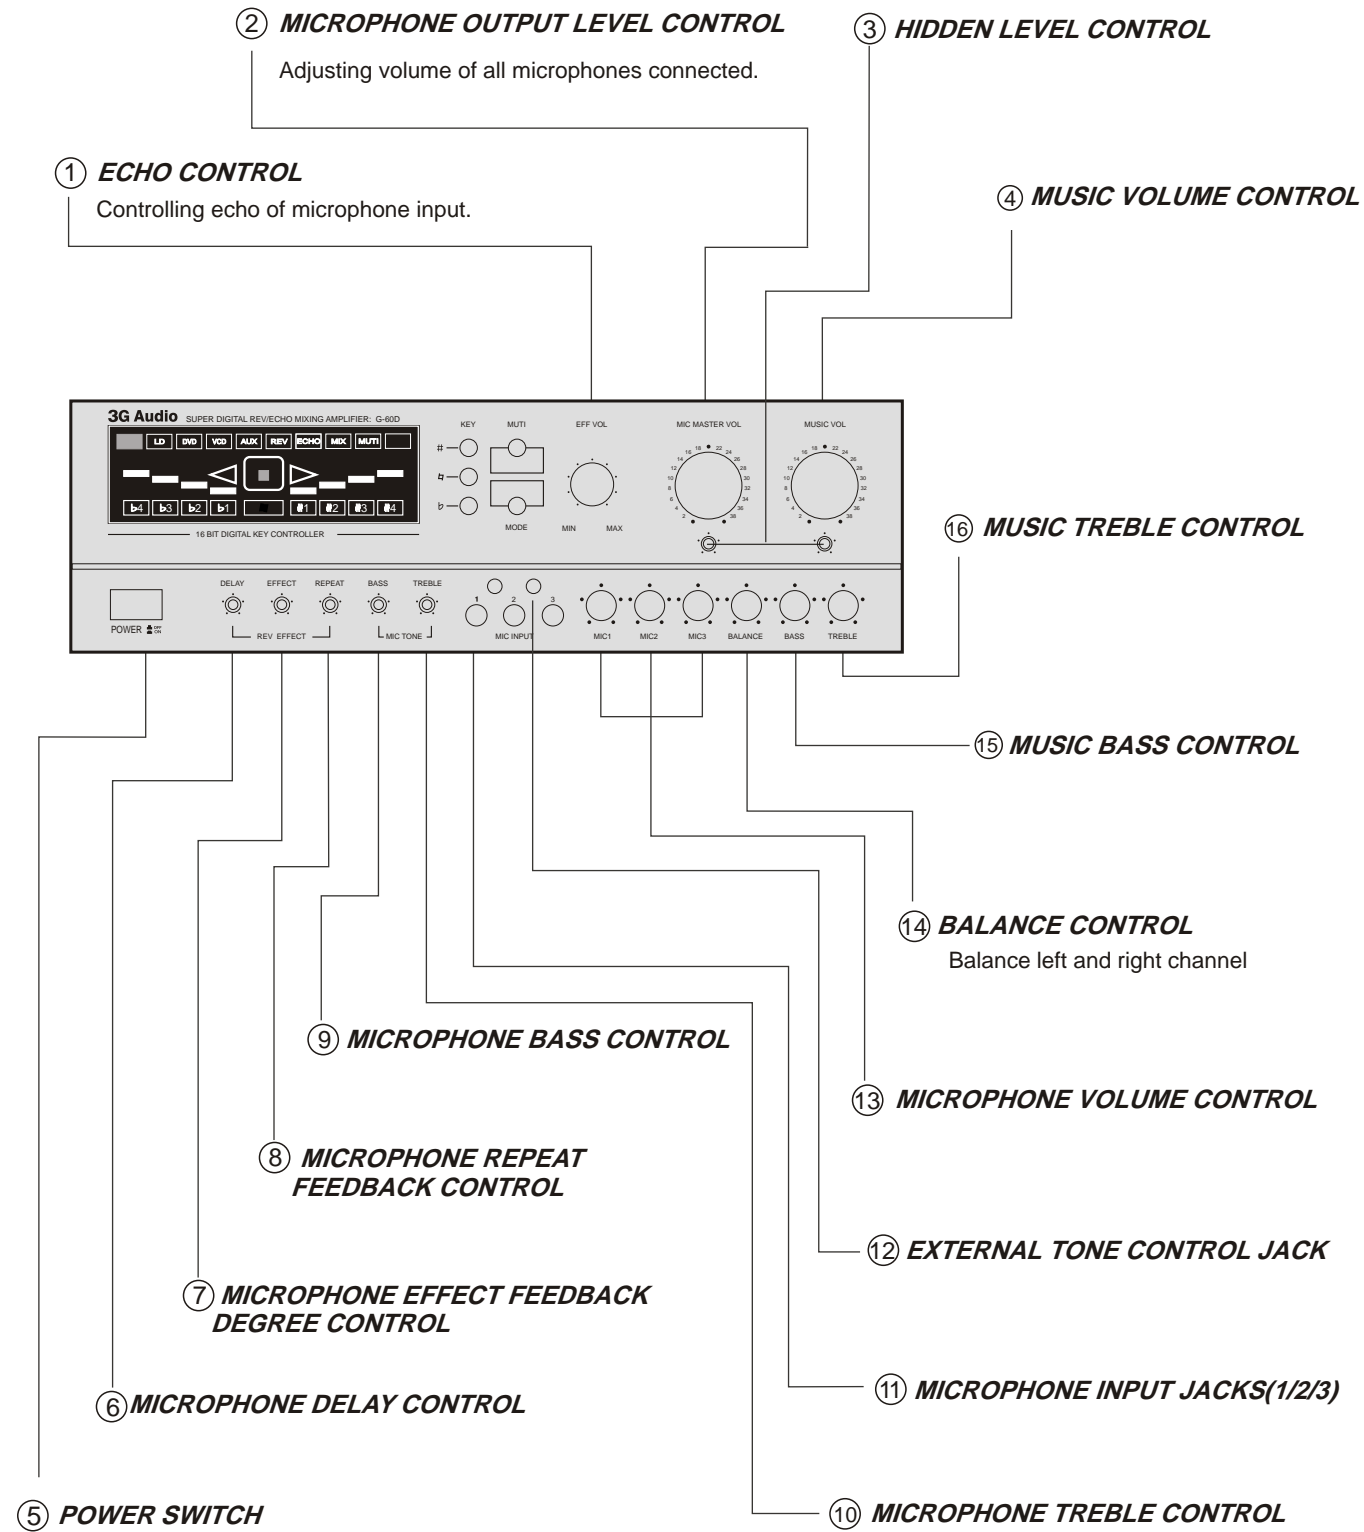

FUNCTION INSTRUCTIONS (FRONT PANEL)

G-60E

