


## Features:

- Two-way active speaker with one 10" woofer and one 1" driver.
- Cabinet is made from polypropylene and special high-tech material. It's durable, anti-shock and has good damping characters.
- Voice coil in the 10" woofer is made from 50mm copper cladding aluminium ribbon wire.
- Heavy duty protective grille.
- Rotatable 90°x60° (HxV) dispersion horn makes it suitable for any performance purposes.
- Molded-in pole mount, easily suspended.
- Arrayable vertically in 4 layers or horizontally in more than 8 columns.



Beta Three

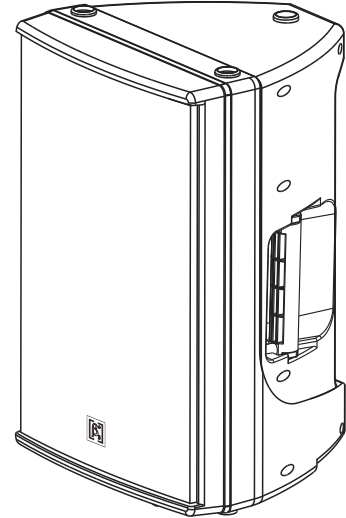


## Model:N10a

### Technical Parameters

System:	Built-in crossover two way full range active speaker
Driver Quantity:	Bass: 1 x 10" Driver: 1 x 1.3"
Frequency Response(-3dB):	55Hz-18KHz
Frequency Response(-10dB):	50Hz-18KHz
Max Sound Level(dB/1M):	117dB
Level Adjust Range:	± 10dB(100Hz)- Bass ± 10dB(10KHz)- Treb
Amplifier Power Output :	150W
Distortion:	Line-0.02%, Microphone-0.04%
Tweeter Dispersion(HxV):	
Load Impedance:	8 Ohm
Input Impedance:	Line - 20kOhm, Microphone - 10kOhm
Connectors:	2 x XLR
Power Supply:	AC 220V-240V~, 50/60Hz (or AC 110V-120V~, 50/60Hz)
Dimensions(W x D x H mm/pcs):	321 x 321 x 464 mm
Packing Dimensions(W x D x H mm/pcs)	375 x 355 x 535mm
Net Weight(Kg/pcs):	10.5Kg
Gross Weight(Kkg/pcs):	11.8Kg



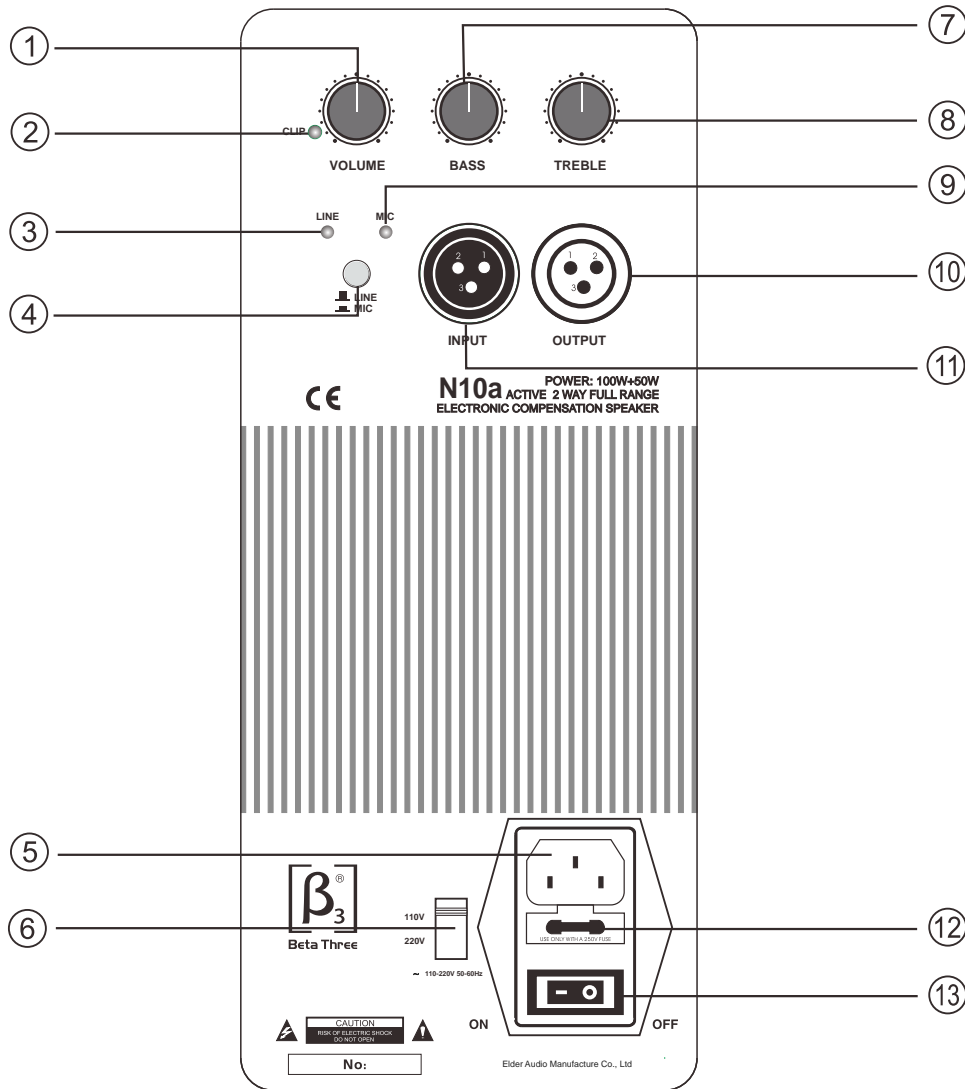

- |  |   |
|--|---|
| <ol style="list-style-type: none"> <li>1. Volume control</li> <li>2. Clip indicator.</li> <li>3. Line input signal presence indicator.</li> <li>4. Line/microphone selector.</li> <li>5. Power supply input. Make sure that the voltage selector is set for your country's correct voltage.</li> <li>6. 110V/220V voltage input selector.</li> <li>7. Bass control.</li> </ol> | <ol style="list-style-type: none"> <li>8. Treble control.</li> <li>9. Microphone input signal presence indicator.</li> <li>10. Line/microphone output.</li> <li>11. Line/microphone input.</li> <li>12. Protection fuse. Use only fuses of the correct amp rating.</li> <li>13. Power ON/OFF switch.</li> </ol> |
|--|---|

*Cosmetic changes may be made*

