



Features:

- Two-way active speaker with one 12" woofer and one 1.75" driver.
- Cabinet is made from polypropylene and special high-tech material. It's durable, anti-shock and has good damping characters.
- Voice coil in the 12" woofer is made from \varnothing 75mm copper cladding aluminium ribbon wire.
- Heavy duty protective grille.
- Rotatable 50-100°x55° (HxV) dispersion horn makes it suitable for any performance purposes.
- Molded-in pole mount, easily suspended.
- Vertical or horizontal layout, can be used as a monitor or in any flying systems.
- Arrayable vertically in 4 layers or horizontally in more than 8 columns.




Beta Three

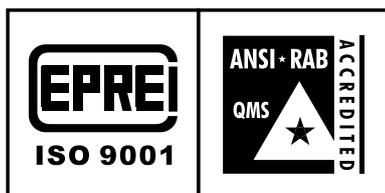

Model:N12a

Technical Parameters

System:	Built-in crossover two way full range active speaker	
Driver Quantity:	12"x1(Bass)	1 x \varnothing 44mm Driver
Frequency Response(-3dB):	50Hz-18KHz	
Frequency Response(-10dB):	40Hz-20KHz	
Max Sound Level(dB/1M):	118dB	
Level Adjust range:	\pm 10dB(100Hz)-Bass \pm 10dB(10KHz)-Treb	
Output power:	300W(Bass)+100W(Treb)	
Distortion:	Line-0.02%, Microphone-0.04%	
Rotatable horn(HxV):	50-100°x55°	
Load impedance:	Treb - 8Ohm, Bass - 8 Ohm	
Input impedance:	Line - 20KOhm, Microphone - 10KOhm	
Connectors:	XLR K3P	
Power supply:	AC 110/220V, 50/60Hz	
Dimensions(WxDxH mm/pcs):	415X391X600mm	
Packing Dimensions(WxDxH mm/pcs)	465X435X680mm	
Net Weight(Kg/pcs):	23Kg	
Gross Weight(Kg/pcs):	25.2Kg	

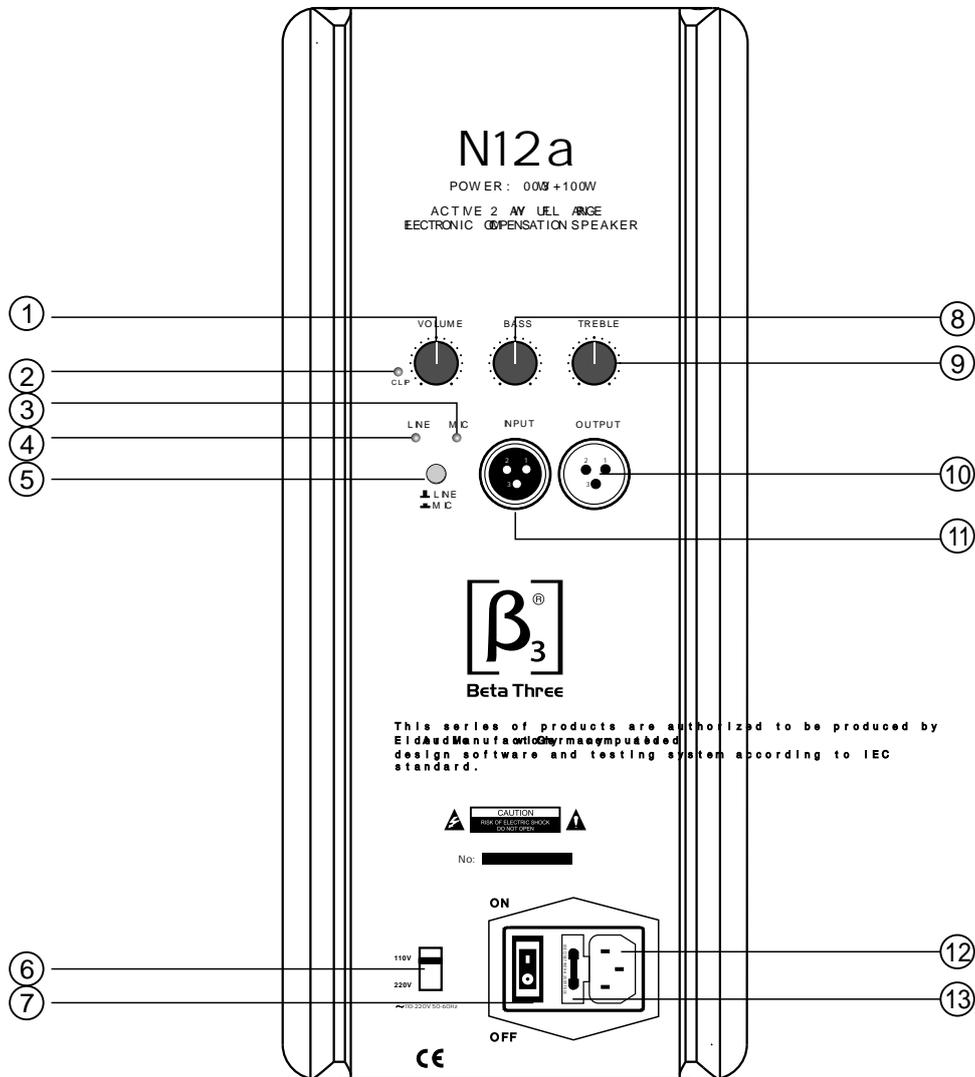

1. Volume control.
2. Clip indicator.
3. Microphone input signal presence indicator.
4. Line input signal presence indicator.
5. Line/microphone selector.
6. 110V/220V voltage input selector.
7. Power **ON/OFF** switch.
8. Bass control.

9. Treble control.
10. Line/microphone output.
11. Line/microphone input.
12. Power supply input. Make sure that the voltage selector is set for your country's correct voltage.
13. Protection fuse. Use only fuses of the correct amp rating.