



ΣS212a/85

ACTIVE WOODEN SPEAKER

User's manual



ED-B3-MA-050511-002



Features :





- Two way phase reversed active wooden subwoofer with two transducer professional efficient transducer, computer simulating design
- 2 way active full range speaker
- One 12" woofer
- One 3" compression driver with titanium diaphragm
- Bi-amplifier design for independant HF, LF, active frequency compensation , auto electrical limit protection adjust for LF/HF
- Cabinet built with high intensity materials
- Flying point in the cabinet, support hole in the bottom big dynamics and high sensitivity, MF/HF is very clear and LF is very powerful
- Suited for avenues where require high quality reinforcement, like bar, bands, cimema, multi-functional room,VIP room meetingroom etc.
- Suitable for moving performance, such as commercial promotion, bands performance, party, can be used as the reinforce speaker living performance of electric guitat , keyboard





Specifications :

System:	Built-in Crossover two way full ranger active speaker
Cabinet configuration	High intensity configuration
Fequency Response(-3dB):	60Hz~16KHz
Amplifier Power Output:	Treb:100W Bass:300W
Max SPL(1m):	120dB(Free Field)
Frequency adjust:	100Hz: ± 12dB/10Hz: ± 12dB
Input Impedance:	Balance:20K , Unbalance:10K
Dispersion(H × V):	80°X50 °
Input Connectors:	XLR J3P/XLR K3P
Power supply:	AC 220V-240V~, 50/60Hz (or AC 110V-120V~, 50/60Hz)
Dimensions (W × D × H):	377 × 395 × 610mm
Packaging Dimensions 1pcs/pack(W × D × H):	505 × 485 × 730mm
Net Weight(1Pcs):	30Kg
Gross Weight:	35Kg

Cabinet Dimension :

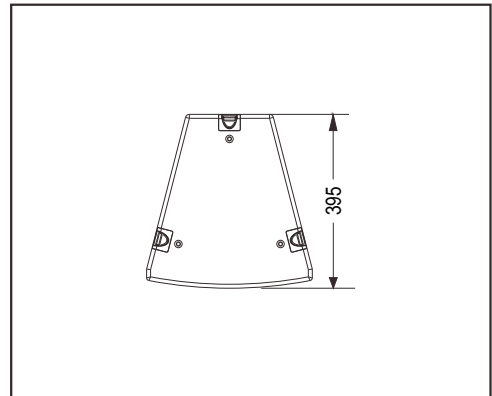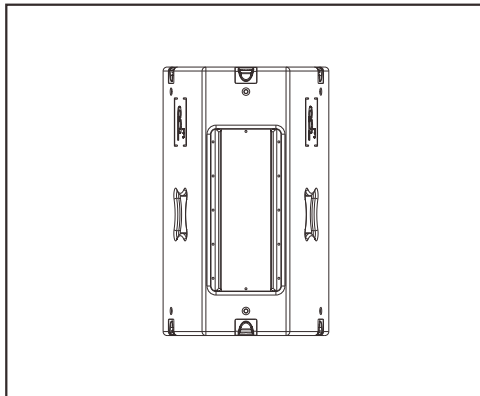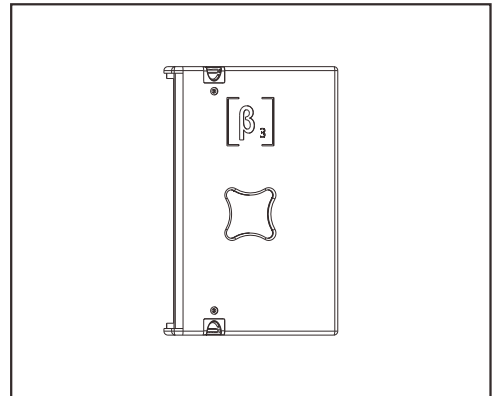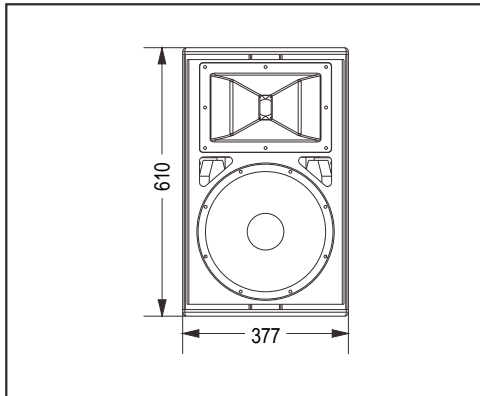

Installation drawing :

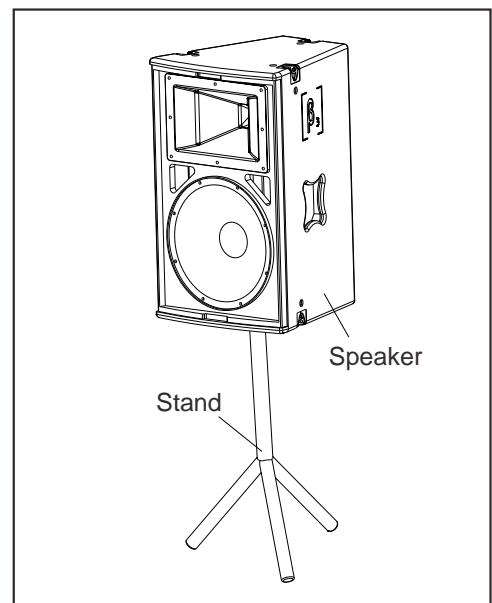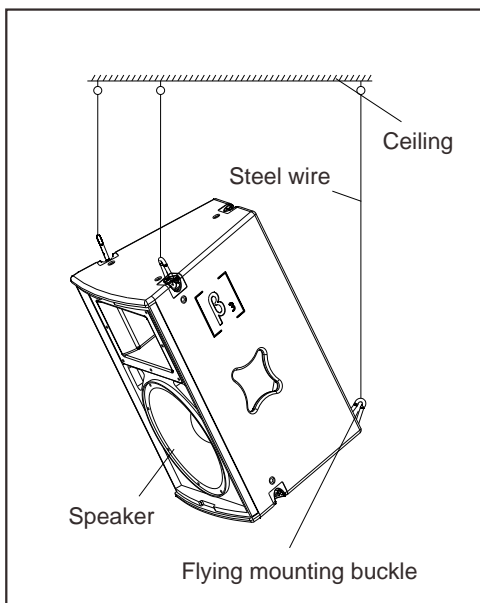



User's Manual

ΣS212a/85 ACTIVE WOODEN SPEAKER