







# S206/50

Toasting paint speaker

User's manual



ED-B3-MA-050325-003



Features :





- Two transducers two way phase-reversed full range professional speaker, professional and efficient transducers, computer simulating design.
- Two transducers two way full range
- High SPL, high sensitivity speaker
- One 6 " woofer with big power
- One 1" compression driver with PEI diaphragm
- Drived by single amplifier
- 140° x 140° wide dispersion can get the better covering
- Computer analog design bring better frequency response and phase
- Flexible and convenient installation mode
- Used for full range sound reinforcement, language reinforcement for meeting system, background music, bar, dance hall and other public avenues
- Suitable to be as monitor and sound compensation for any big audio project and touring performance
- Can work with 3 high energy subwoofer( B118D) when used for high quality replaying music







Specifications :

Fequency Response(-3dB) :	80Hz-18KHz
Sensitivity(1m/1W):	90dB
Max SPL(1m):	109/115dB (Peak )
Crossover Frequency:	3.2KHz
Dispersion(H x V):	140 °x 140 °
Rated Power(RMS):	80W
Rated Impedance:	8 Ohm
DC Impedance :	5.6 Ohm
THD :	<3%
Input Connectors :	NL4 x 1
Net Weight(1Pcs):	6kg
Gross Weight:	15kg
Dimensions (W x D x H):	212 x 194 x 364mm
Packaging Dimensions 2pcs/pack(W x D x H):	541 x 293 x 465mm

Cabinet Dimension :

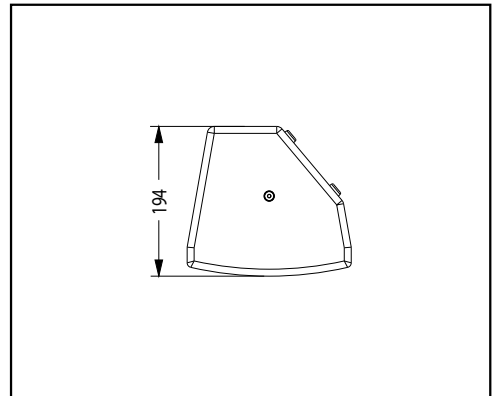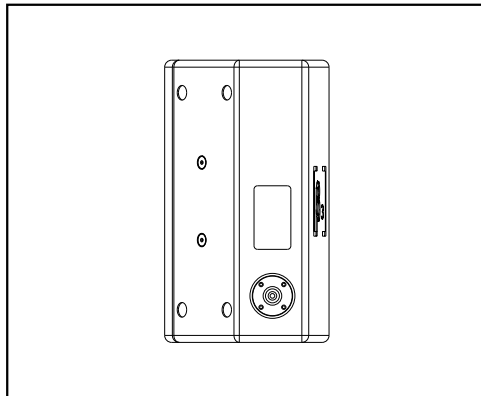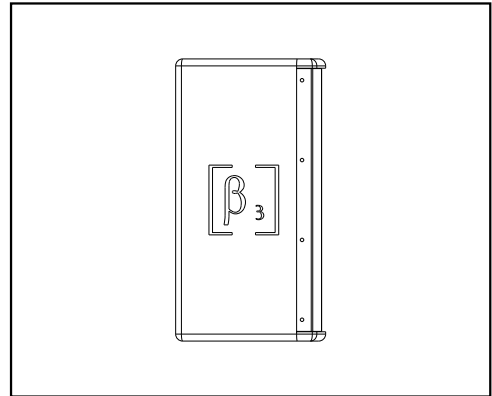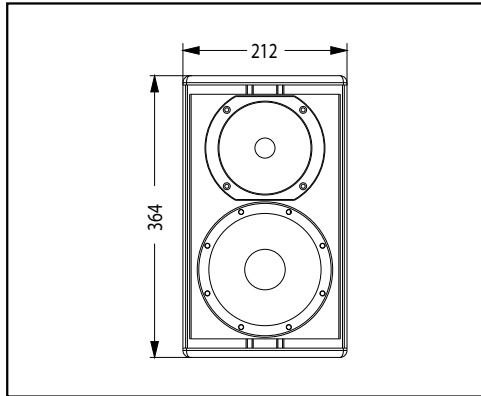

Installation drawing :

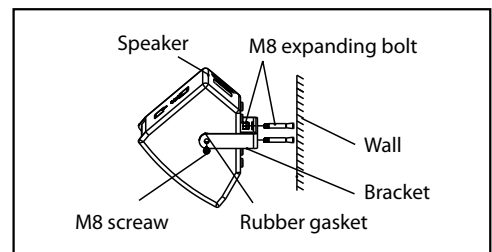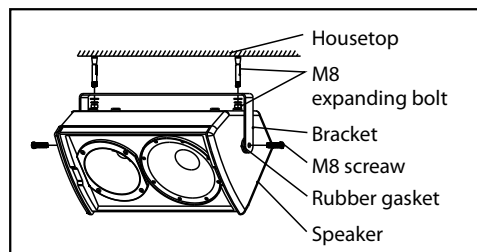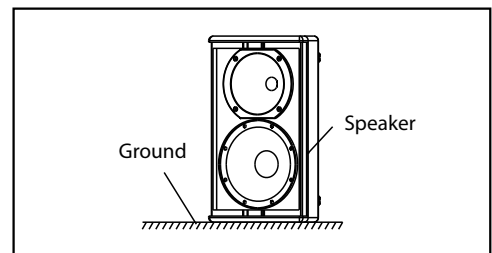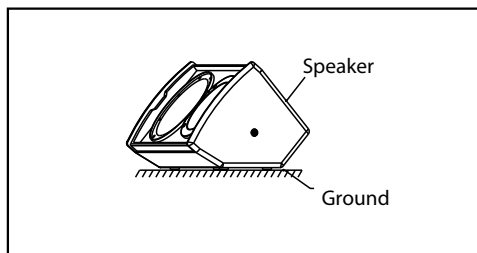



# User's Manual

S206/50

FULL RANGE PROFESSIONAL SPEAKER